



ELEVAH® 65 MOVE LIGHT

Max. working height		6,5 m
Max capacity		150 kg
Number of people		1
Use		Internal
A	Closed machine height	1700 mm
B	Minimum platform height	400 mm
C	Maximum platform height	4345 mm
D	Base overall dimensions	1280 mm
E		780 mm
F	Cage dimensions	770 mm
G		790 mm
Machine weight		538 kg
Power supply		24 V
Batteries		Lead-Acid Batteries 12V 105 Ah
Battery charger		110V – 220V
Climbing ability at height		2,5 %
H	Maximum climbing ability	15 %
Drive wheels dimension		Ø 230 x 60 mm
Swivel wheels dimensions		Ø 200 x 50 mm
Internal turning radius		0
External turning radius		1095 mm
Max. speed (rising – descending)		0,2 m/s
Maximum shifting speed (on the ground - at height)		4 km/h - 1km/h
I	Maximum pressure for wheel at full load*	1,9 kN
Work cycles (with fresh batteries)**		130

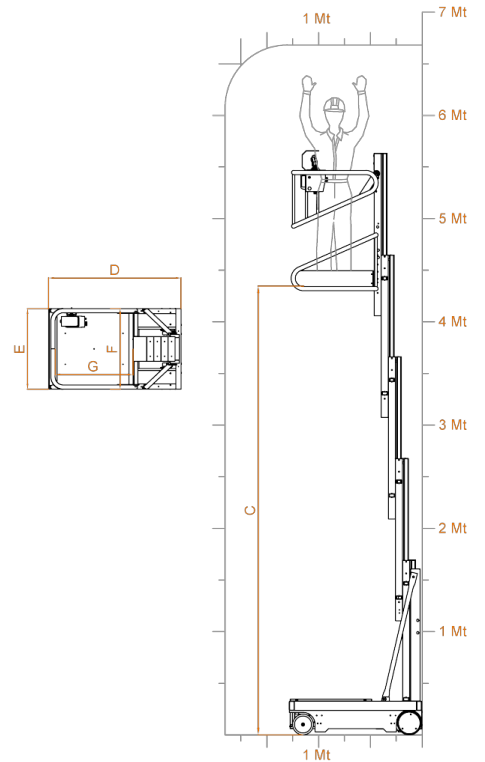

538 Kg

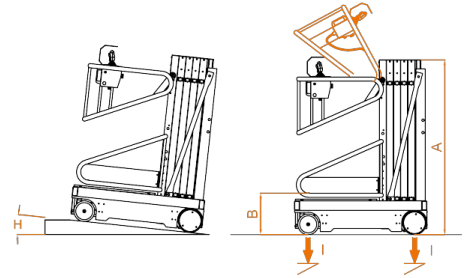

* Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

** By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height and with adjustment of the loading platform.



Compliant with **EN280** rule.
Approved for outdoor use in the absence of wind.