

ELEVAH[®] 80 MOVE picking



ELEVATOR[®] 80 MOVE picking







Max. working height		7,78 m
Max capacity		200 kg
Number of people		1
Use		Internal - External
A	Closed machine height	1980 mm
B	Minimum platform height	650 mm
C	Maximum platform height	5780 mm
D		1280 mm
E	Base overall dimensions	1780 mm
F		780 mm
G	Cage dimensions	640 mm
H		710 mm
Machine weight		860 kg
K	Fixed picking tray dimensions	440 mm
L		740 mm
Fixed picking tray capacity		20 kg
Drive wheels dimension		Ø 220 x 65 mm
Swivel wheels dimensions		Ø 200 x 50 mm

PICKING PLATFORM

Adjustment		Electrical
Stroke		660 mm
Min. height from the ground		1030 mm
Maximum height from the ground		6830 mm
I	Dimensions	500 mm
J		680 mm
Capacity		100 kg

PERFORMANCE

Power supply		Electrical
Batteries		Lead-Acid Batteries 12V 105 Ah
Battery charger		110V – 220V 50/60HZ
M	Maximum climbing ability	15%
Climbing ability at height		2,5%
Internal turning radius		0
External turning radius		1095 mm
Max. speed (rising – descending)		0,2 m/s
Maximum speed (with basket on the ground)		5 km/h
N	Maximum pressure for wheel at full load*	3,7 kN
Work cycles (with fresh batteries) **		Ca. 130

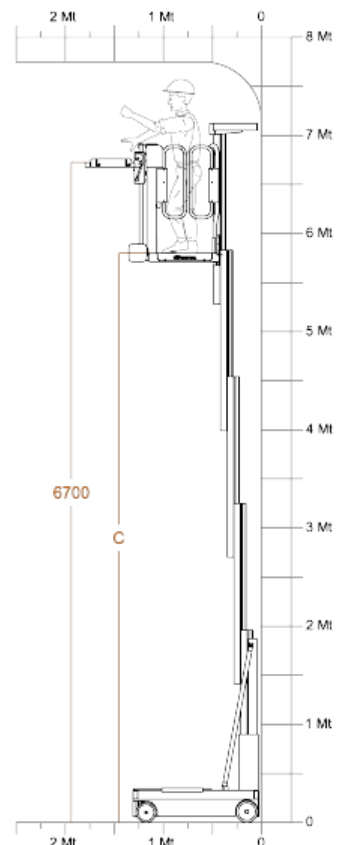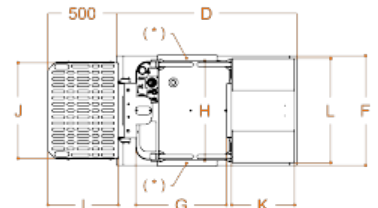

* Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

** By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height and with adjustment of the loading platform.



Complies with European regulations for man-up forklift trucks. UNI EN ISO 3691-1.